


**3/4" Ø  
ANGLE QUICK VALVE**

**MATERIAL SPECIFICATIONS**

<b>Description</b>	: CTS
<b>Make</b>	: Brass or Copper Alloy
<b>Type</b>	: Spindle with hole for shackle lock
<b>Body Markings</b>	: Embossed
<b>Hole Size for Shackle Lock</b>	: 9 mm
<b>Gross Weight</b>	: 0.55 kgs (minimum)
<b>Lengths</b>	
<b>Vertical (w/ cap tighten)</b>	: 95 mm (minimum)
<b>Horizontal (w/ coupling)</b>	: 70 mm (minimum)
<b>Flaring Set</b>	: 6 mm (minimum)
<b>Working Pressure</b>	: 150 psi
<b>Other Requirements</b>	: Original Manufacturer's Product Brochures / Manual / Literatures
	: Specify Delivery Packaging

**DRAWINGS**

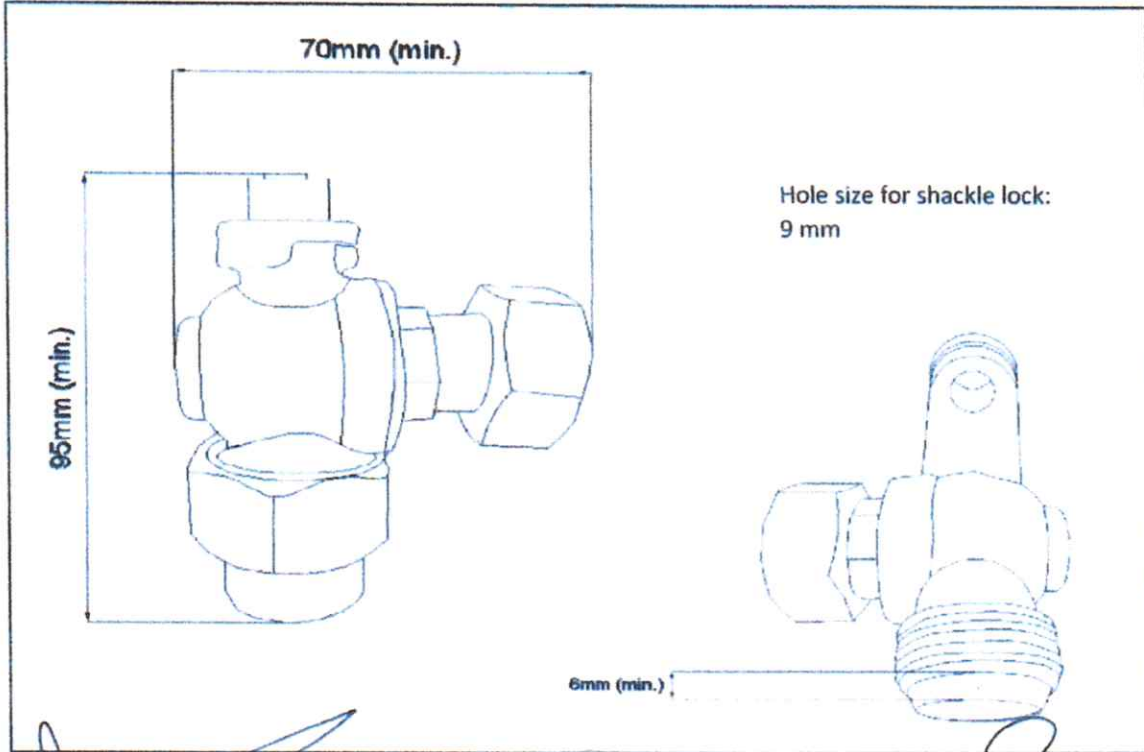

**RUF0 B. BAGAY**  
Member

**LARRY R. DACER**  
Member

**ALLAN D. CHIONG**  
Member

**GLORIA H. VILLEGAS**  
Member / Secretary

**FARAH C. BAGARES**  
Chairman